

RUGER GP100 NO. KGP161 357 MAGNUM, \$701


GUN TESTS GRADE: A-

Tagged initially for a sticky ejector rod, the GP100 was at its best firing the hottest magnum loads.



SPECIFICATIONS

Overall Length	11.5 in.
Barrel Length	6.0 in.
Sight Radius	7.5 in.
Overall Height	6.25 in.
Front Strap Height	2.3 in.
Back Strap Height	4.3 in.
Weight Unloaded (125-gr)	44.3 oz.
Weight Loaded	47.2 oz.
Capacity	6
Maximum Width	1.55 in.
Grip Thickness (max)	1.25 in.
Grip Circumference (max)	5.1 in.
Frame	Satin Stainless Steel
Barrel	Stainless Steel
Grip	Pebble-Finish Rubber
Trigger Pull Weight Double Action	14.0 lbs.
Trigger Pull Weight Single Action	4.25 lbs.
Trigger Span Double Action	3.0 in.
Trigger Span Single Action	2.5 in.
Warranty	Lifetime
Telephone	(603) 865-2442
Website or Email	www.ruger.com
Manufactured in/Assembled in	USA/USA

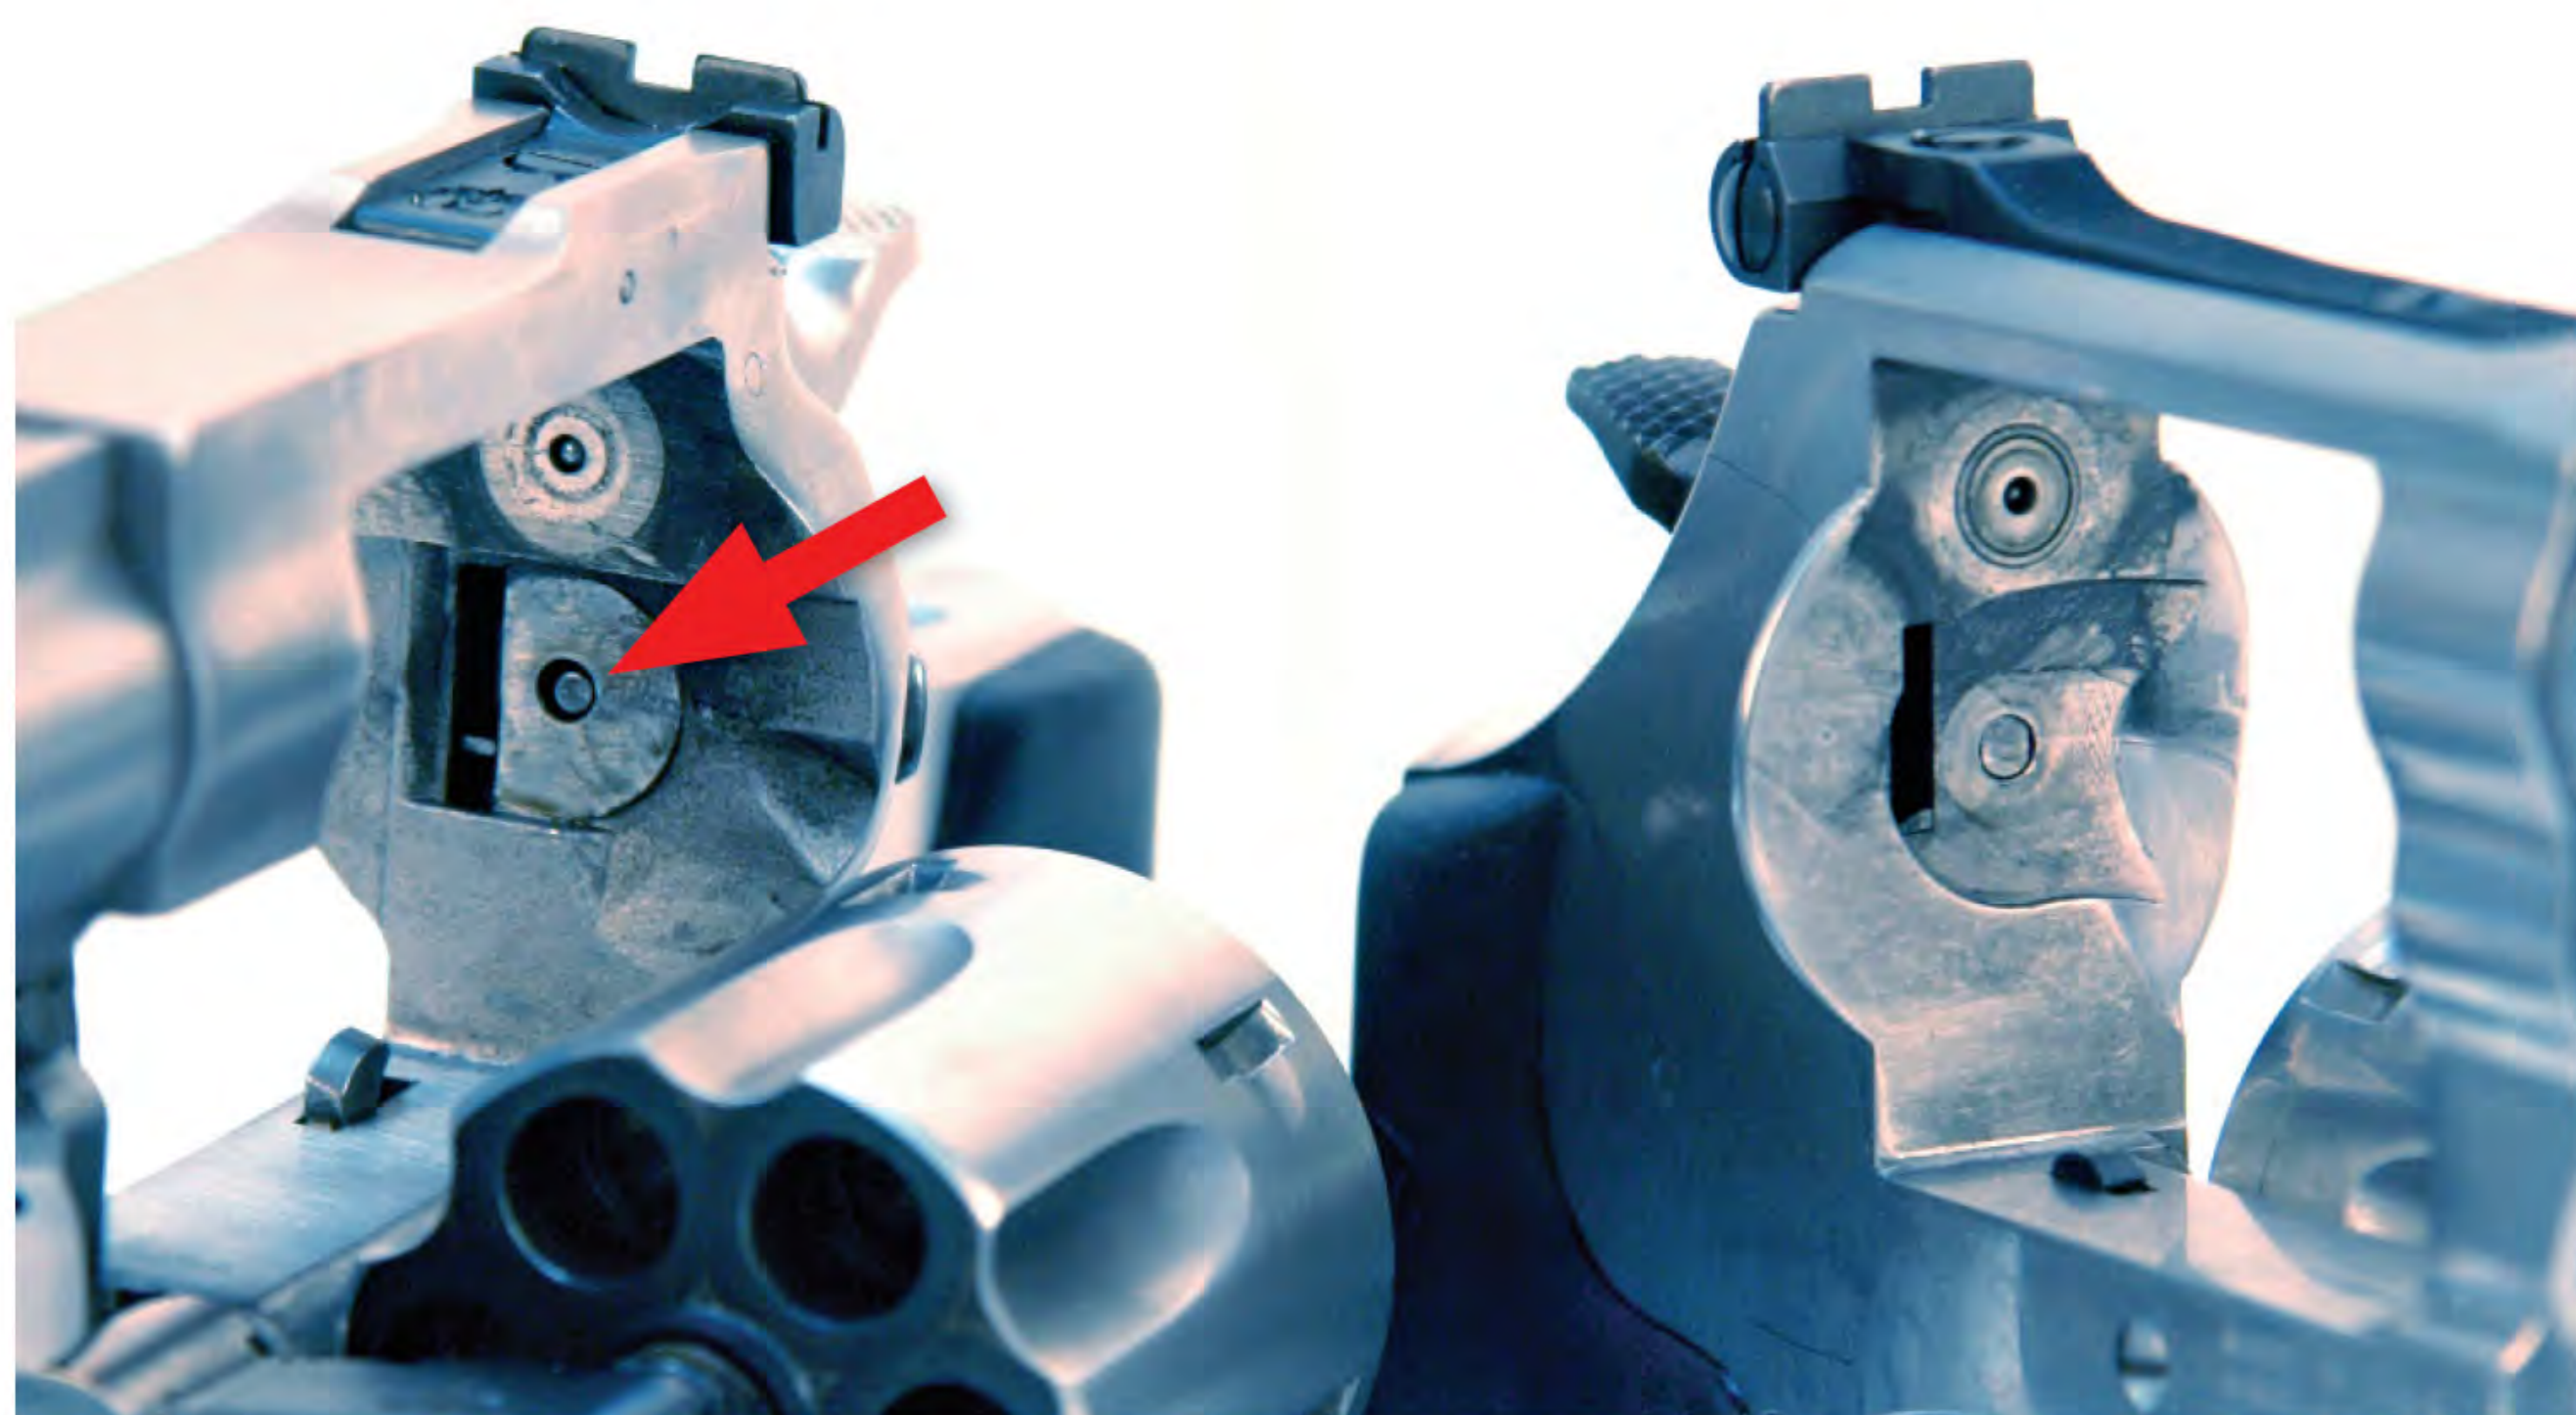

The Ruger front sight was pressed in from the side and pinned from the front (arrow). Note the steep recess to the barrel crown.



The GP100 (left) utilized a detent in the crane, a recess in the breech face (arrow) to locate the center pin, and a taller locking lug with which to hold the cylinder in check.

Rear-sight adjustment screws required two different-sized screwdrivers. The windage screw was much smaller than the elevation screw, but both were click adjustable. Contrary to most other units, turning the windage screw to the right (clockwise) moved point of impact left.

