


CZ 550 FS NO. 04050 6.5X55MM, \$894

GUN TESTS GRADE: B+

In this trio, the CZ stands out for its low price, top accuracy, and simple operation. For a Mannlicher that's more than just a show piece, this CZ is hard to beat.

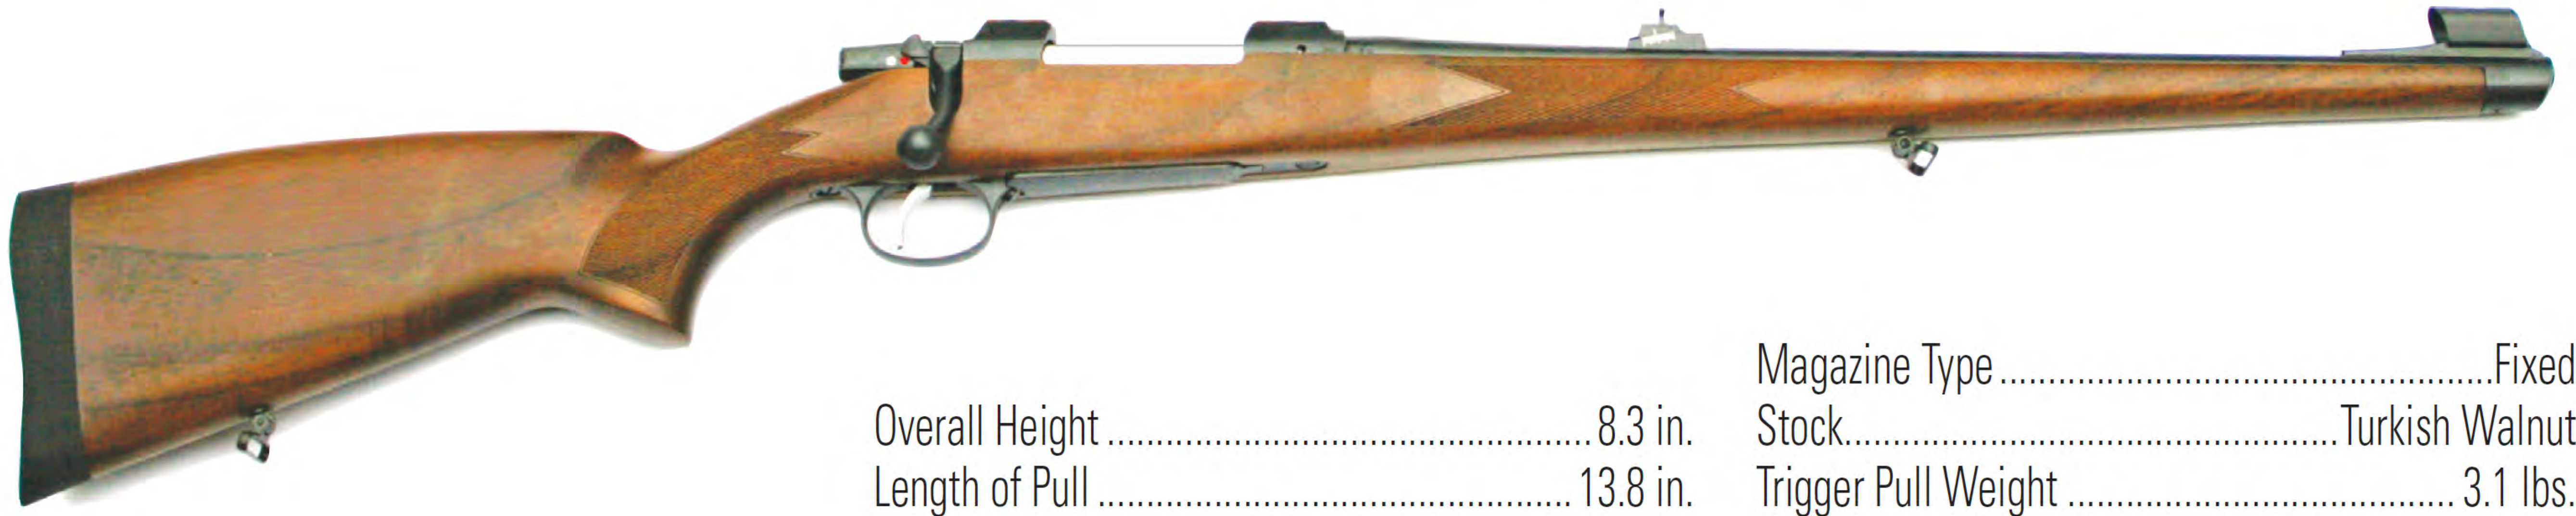

SPECIFICATIONS

Overall Length 41.5 in.
 Barrel Length & Twist 20.5 in., 1-in-9 in.
 Sight Radius 13.5 in.

Overall Height 8.3 in.
 Length of Pull 13.8 in.
 Weight Unloaded 7.2 lbs.
 Capacity 5+1
 Action Finish Blued
 Action Type Bolt
 Barrel Finish Blued



Magazine Type Fixed
 Stock Turkish Walnut
 Trigger Pull Weight 3.1 lbs.
 Set Trigger Pull Weight 11 oz.
 Warranty Limited 5 Year
 Telephone (800) 955-4486
 Website www.CZ-USA.com
 Made In Czech Republic

Right: The ramped rear sight provided white-line graduations for elevation adjustments.



Far Right: The steel

muzzle cap was fixed to the stock and barrel and housed the hooded front sight with a small white bead. The cutout allows sunlight to reach the blade. A button on the front sight allowed the blade to be removed (arrow).

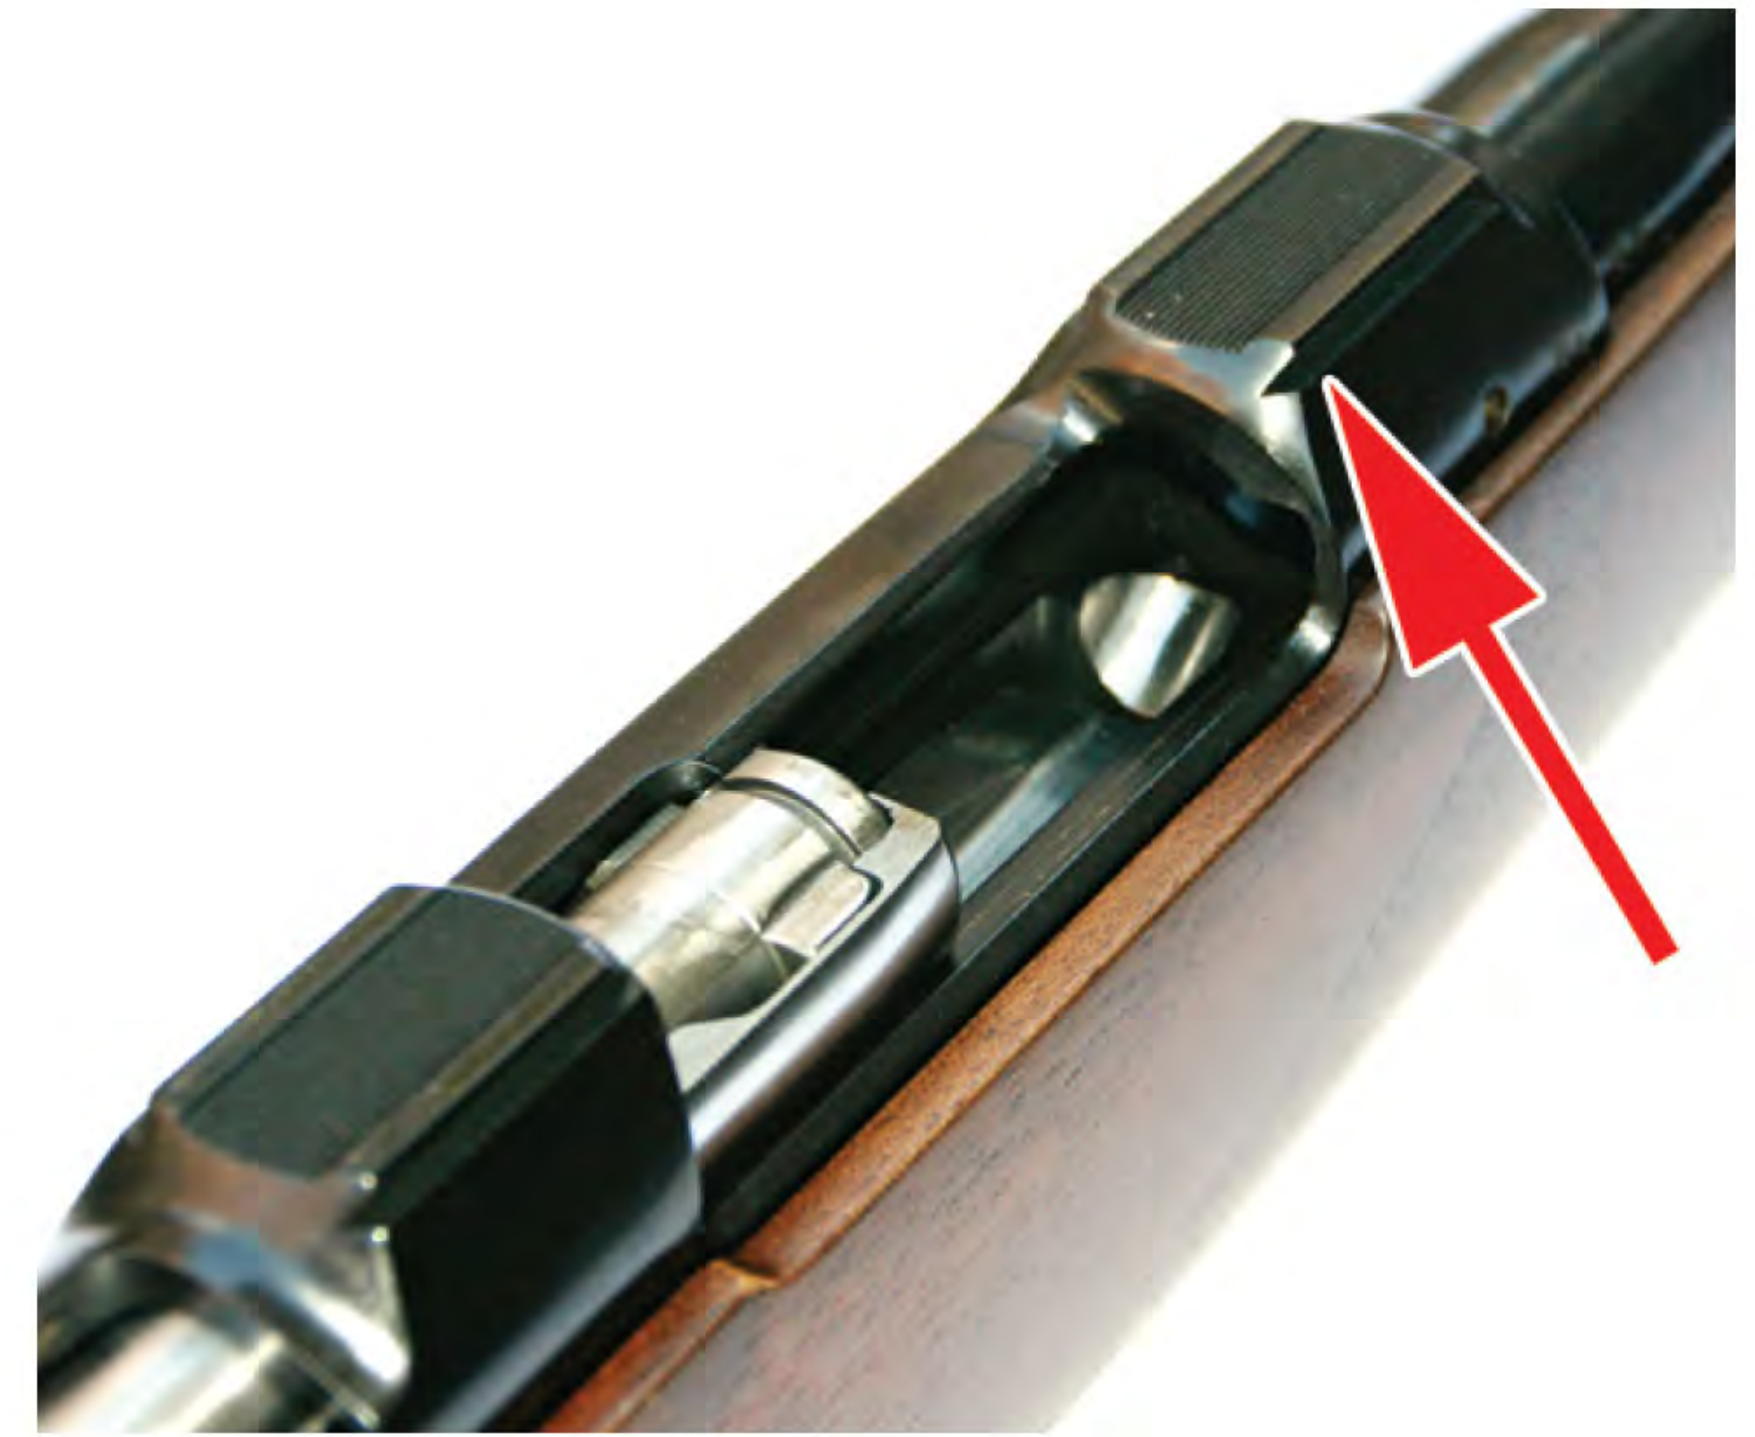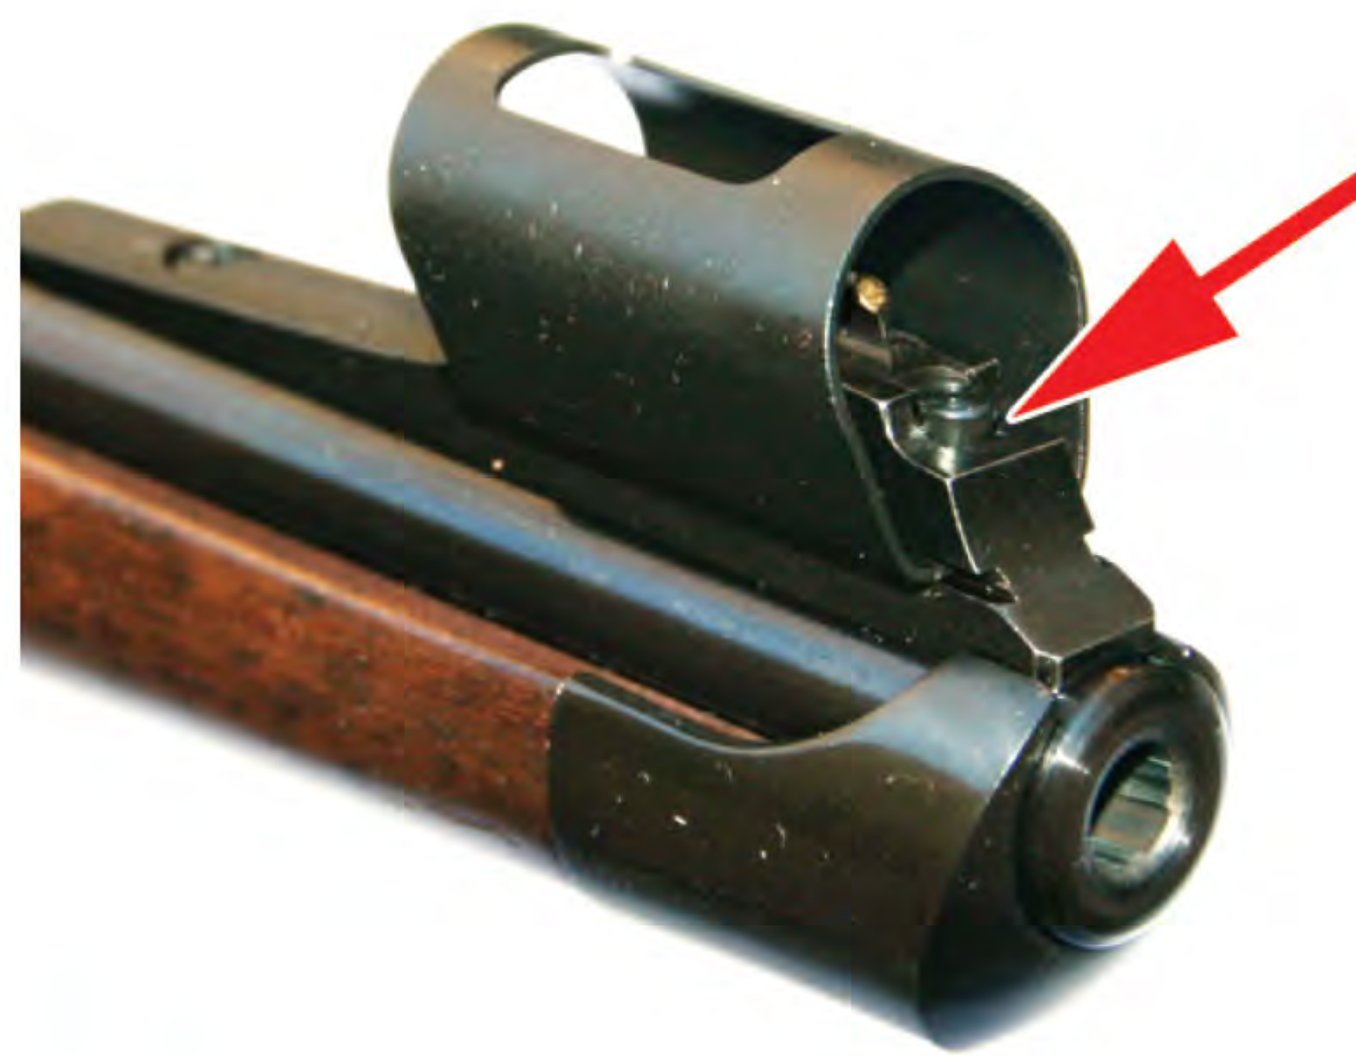

Above: The Mauser-style bolt had a claw extractor for positive feeding and two-lugs with a 90-degree bolt lift. The bolt was brightly polished. The CZ's receiver came grooved to accept scope rings (arrow), and 1-inch steel rings were included.



Above: The dark-stained Turkish walnut buttstock had a semi-matte finish highlighting the lines of its traditional Bavarian humpback stock and angular cheekpiece. The checkering was laser cut. The recoil pad was thick and soft. Our team said the CZ felt trim and mounted easily.



Above: The 3-position safety is on the right side. Pushing the tab all the way forward exposed a white dot and locked both the trigger and bolt. One notch backward still showed the dot and allowed the bolt to be operated, but not the trigger. All the way back showed a red dot for Fire.



Above: The shooter emptied the fixed box magazine by pressing the grooved button (arrow), which released the floorplate, dumping rounds smartly.